MAX-8

V2107.02



Let's grow together

MAX-8

Excellent Performances & Reliability

CPCD20-35T8

CPQD30-35T8

T8 series 2.0-3.5t forklift

EP EQUIPMENT CO.,LTD
www.ep-ep.com

CE

CPCD20/25T8

T8 series 2.0-2.5t forklift specification

General	1	Manufacture			EP								
	2	Model			CPCD20T8-S4S	CPCD20T8-C490	CPCD20T8-C240	CPCD20T8-TD27	CPCD25T8-C490	CPCD25T8-S4S	CPCD25T8-C240	CPCD25T8-TD27	CPCD25T8-GK25
	3	Power type			Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Gasoline
	4	Rated capacity		Kg	2000	2000	2000	2000	2500	2500	2500	2500	2500
	5	Load center		mm	500	500	500	500	500	500	500	500	500
Characteristics & Dimensions	6	Lift height		mm	3000	3000	3000	3000	3000	3000	3000	3000	3000
	7	Free lift height		mm	120	120	120	120	120	120	120	120	120
	8	Fork size	L×W×T	mm	1070×120×40	1070×120×40	1070×120×40	1070×120×40	1070×120×40	1070×120×40	1070×120×40	1070×120×40	1070×120×40
	9	Mast tilt range	F/R	deg	6\12	6\12	6\12	6\12	6\12	6\12	6\12	6\12	6\12
	10	Fork overhang(wheel center to fork face)		mm	476	476	476	476	476	476	476	476	476
	11	Rear overhang		mm	485	485	485	485	550	550	550	550	550
	12	Overall dimensions	Length to face of fork	mm	2610	2610	2610	2610	2660	2660	2660	2660	2660
	13		Overall width	mm	1150	1150	1150	1150	1150	1150	1150	1150	1150
	14		Mast lowered height	mm	2050	2050	2050	2050	2050	2050	2050	2050	2050
	15		Mast extended height	mm	4200	4200	4200	4200	4200	4200	4200	4200	4200
	16		Overhead guard height	mm	2130	2130	2130	2130	2130	2130	2130	2130	2130
	17	Turning radius(outsude)		mm	2170	2170	2170	2170	2230	2230	2230	2230	2230
	18	Min.right angle stacking aisle wiath (Add load length and clearance)		mm	2680	2680	2680	2680	2740	2740	2740	2740	2740
Performance	19	Speed	Travel (No load)	Km/h	20	20	20	20	20	20	20	20	20
	20		Lifting (Full load)	mm/sec	450	450	450	450	450	450	450	450	450
	21		Lowering (Full load)	mm/sec	450	450	450	450	450	450	450	450	450
	22	Max.Drawbar Pull (Full load)		N	14300	14300	14300	14300	14800	14800	14800	14800	14800
	23	Max.Gradeability (Full load)		%	20	20	20	20	20	20	20	20	20
Chassis	24	Tyres	Front	mm	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR
	25		Rear	mm	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR
	26	Tread	Font	mm	970	970	970	970	970	970	970	970	970
	27		Rear	mm	970	970	970	970	970	970	970	970	970
	28	Wheelbase		mm	1600	1600	1600	1600	1600	1600	1600	1600	1600
	29	Ground clearance	Lowest		120	120	120	120	120	120	120	120	120
	30		Wheelbase center		145	145	145	145	145	145	145	145	145
Weight	31	Self weight		Kg	3580	3580	3580	3580	3920	3920	3920	3920	3920
	32	Weight Distribution	Full load Front		4856	4856	4856	4856	5588	5588	5588	5588	5588
	33		Full load Rear		724	724	724	724	832	832	832	832	832
	34		No load Front		1428	1428	1428	1428	1560	1560	1560	1560	1560
	35		No load Rear		2152	2142	2142	2142	2360	2360	2360	2360	2360
Power & transmission	36	Battery	Voltage/Capacity(20HR)	V/AH	12/60	12/80	12/80	12/80	12/80	12/60	12/60	12/60	12/60
	37	Engine	Modal		S4S-DPEU2	C490BPG-25	C240	TD27	C490BPG-25	S4S-DPEU2	C240	TD27	GK25
	38		Manufacture		Mitsubishi	XIN CHAI	ISUZU	GCT	XIN CHAI	Mitsubishi	ISUZU	GCT	GCT
	39		Rated output/r.p.m	kw	35.3/2250	36.8/2650	34.5/2500	38.5/2300	36.8/2650	35.3/2250	34.5/2500	38.5/2300	37.4/2300
	40		Rated torque/r.p.m	N.m	177/1700	156/1700-1900	139/1800	160/2300	156/1700-1900	177/1700	139/1800	160/2300	176.5/1600
	41		No.of cylinder		4	4	4	4	4	4	4	4	4
	42		Bore×Stroke	mm	94×120	90×105	86×102	96/92	90×105	94×120	86×102	96/92	89×100
	43		Displacement	cc	3331	2670	2369	2663	2670	3331	2369	2663	2488
	44		Fuel tank capacity	L	60	60	60	60	60	60	60	60	60
	45	Transmissions	Manufacture		OEM	OEM	OEM	OEM	OEM	OEM	OEM	OEM	OEM
	46		Type		Powershift	Powershift	Powershift	Powershift	Powershift	Powershift	Powershift	Powershift	Powershift
	47		Stage FWD/RVS		1/1	2/2	1/1	1/1	2/2	1/1	1/1	1/1	1/1
	48	Operating pressure	For attachments	Mpa	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5

1.Special lifting height available (2-stage mast :2.5m,2.7m,3.0m,3.3m,3.5m,3.6m,3.7m,4m,4.3m,4.5m,5m. Full Free Duplex Mast 3.0m,3.3m,3.5m,3.6m. 3-stage mast : 4.3m,4.5m,4.8m,5m,5.5m,6m)
2.Attachment available. 3.The specification in the table are for standard models only,For further information please contact us. 4.Specification are subject to change without notice.

CPC(Q)D30/35T8

T8 series 3.0-3.5t forklift specification

General	1	Manufacture			EP											
	2	Model			CPCD30T8-S4S	CPCD30T8-C490	CPCD30T8-A498	CPCD30T8-C240	CPCD30T8-TD27	CPQD30T8-GK25	CPCD35T8-S4S	CPCD35T8-A498	CPCD35T8-TD27	CPQD35T8-GK25	CPCD35T8-4JG2
	3	Power type			Diesel	Diesel	Diesel	Diesel	Diesel	Gasoline	Diesel	Diesel	Diesel	Gasoline	Diesel
	4	Rated capacity		Kg	3000	3000	3000	3000	3000	3000	3500	3500	3000	3500	3000
	5	Load center		mm	500	500	500	500	500	500	500	500	500	500	500
Characteristics & Dimensions	6	Lift height		mm	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000
	7	Free lift height		mm	120	120	120	120	120	120	120	120	120	120	120
	8	Fork size	L×W×T	mm	1070×125×45	1070×125×45	1070×125×45	1070×125×45	1070×125×45	1070×125×45	1070×125×50	1070×125×50	1070×125×50	1070×125×50	1070×125×50
	9	Mast tilt range	F/R	deg	6\12	6\12	6\12	6\12	6\12	6\12	6\12	6\12	6\12	6\12	6\12
	10	Fork overhang(wheel center to fork face)		mm	481	481	481	481	481	481	486	486	481	486	481
	11	Rear overhang		mm	590	590	590	590	590	590	590	590	590	590	590
	12	Overall dimensions	Length to face of fork	mm	2762	2762	2762	2762	2762	2762	2822	2822	2822	2822	2822
	13		Overall width	mm	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200
	14		Mast lowered height	mm	2070	2070	2070	2070	2070	2070	2070	2070	2070	2070	2070
	15		Mast extended height	mm	4210	4210	4210	4210	4210	4210	4210	4210	4210	4210	4210
	16		Overhead guard height	mm	2180	2180	2180	2180	2180	2180	2180	2180	2180	2180	2180
	17	Turning radius(outsude)		mm	2450	2450	2450	2450	2450	2450	2510	2510	2510	2510	2510
	18	Min.right angle stacking aisle wiath (Add load length and clearance)		mm	2950	2950	2950	2950	2950	2950	3010	3010	3010	3010	3010
Performance	19	Speed	Travel (No load)	Km/h	20	20	20	20	20	20	20	20	20	20	20
	20		Lifting (Full load)	mm/sec	400	400	400	400	400	400	400	400	400	400	400
	21		Lowering (Full load)	mm/sec	400	400	400	400	400	400	400	400	400	400	400
	22	Max.Drawbar Pull (Full load)		N	21000	21000	21000	21000	21000	21000	21500	21500	21500	21500	21500
	23	Max.Gradeability (Full load)		%	20	20	20	20	20	20	20	20	20	20	20
Chassis	24	Tyres	Front	mm	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR
	25		Rear	mm	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR
	26	Tread	Font	mm	1010	1010	1010	1010	1010	1010	1010	1010	1010	1010	1010
	27		Rear	mm	980	980	980	980	980	980	980	980	980	980	980
	28	Wheelbase		mm	1700	1700	1700	1700	1700	1700	1760	1760	1760	1760	1760
	29	Ground clearance	Lowest		140	140	140	140	140	140	140	140	140	140	140
	30		Wheelbase center		175	175	175	175	175	175	175	175	175	175	175
Weight	31	Self weight		Kg	4450	4450	4450	4450	4450	4450	4700	4700	4700	4700	4700
	32	Weight Distribution	Full load Front		6488	6488	6488	6488	6488	6488	7134	7134	7134	7134	7134
	33		Full load Rear		962	962	962	962	962	962	1066	1066	1066	1066	1066
	34		No load Front		1810	1810	1810	1810	1810	1810	1927	1927	1927	1927	1927
	35		No load Rear		2640	2640	2640	2640	2640	2640	2773	2773	2773	2773	2773
Power & transmission	36	Battery	Voltage/Capacity(20HR)	V/AH	12/60	12/80	12/80	12/60	12/60	12/60	12/60	12/80	12/60	12/60	12/60
	37	Engine	Modal		S4S-DPEU2	C490BPG-25	A498BT1-39	C240	TD27	GK25	S4S-DPEU2	A498BT1-39	TD27	GK25	4JG2
	38		Manufacture		Mitsubishi	XIN CHAI	XIN CHAI	ISUZU	GCT	GCT	Mitsubishi	XIN CHAI	GCT	GCT	ISUZU
	39		Rated output/r.p.m	kw	35.3/2250	36.8/2650	36.8/2400	34.5/2500	38.5/2300	37.4/2300	35.3/2250	36.8/2400	38.5/2300	37.4/2300	44.9/2450
	40		Rated torque/r.p.m	N.m	177/1700	156/1700-1900	186/1600-1800	139/1800	160/2300	176.5/1600	177/1700	186/1600-1800	160/2300	176.5/1600	184.7/1700
	41		No.of cylinder		4	4	4	4	4	4	4	4	4	4	4
	42		Bore×Stroke	mm	94×120	90×105	95×105	86×102	96/92	89×100	94×120	95×105	96/92	89×100	95.4X107
	43		Displacement	cc	3331	2670	2980	2369	2663	2488	3331	2980	2663	2488	3059
	44		Fuel tank capacity	L	70	60	70	70	60	70	75	70	60	75	75
	45	Transmissions	Manufacture		OEM	OEM	OEM	OEM	OEM	OEM	OEM	OEM	OEM	OEM	OEM
	46		Type		Powershift	Powershift	Powershift	Powershift	Powershift	Powershift	Powershift	Powershift	Powershift	Powershift	Powershift
	47		Stage FWD/RVS		1/1	1/1	1/1	1/1	1/1	1/1	1/1	1/1	1/1	1/1	1/1
	48	Operating pressure	For attachments	Mpa	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5

1.Special lifting height available (2-stage mast :2.5m,2.7m,3.0m,3.3m,3.5m,3.6m,3.7m,4m,4.3m,4.5m,5m. Full Free Duplex Mast 3.0m,3.3m,3.5m,3.6m. 3-stage mast : 4.3m,4.5m,4.8m,5m,5.5m,6m)
2.Attachment available. 3.The specification in the table are for standard models only,For further information please contact us. 4.Specification are subject to change without notice.

CPCD20/25/30/35T8

T8 series 2.0-3.5t forklift specification (Meets Euro Stage V Legislation)

General	1	Manufacture			EP			
	2	Model			CPCD20T8	CPCD25T8	CPCD30T8	CPCD35T8
	3	Power type			Diesel	Diesel	Diesel	Diesel
	4	Rated capacity		Kg	2000	2500	3000	3500
	5	Load center		mm	500	500	500	500
Characteristics & Dimensions	6	Lift height		mm	3000	3000	3000	3000
	7	Free lift height		mm	120	120	120	120
	8	Fork size	L×W×T	mm	1070×120×40	1070×120×40	1070×125×45	1070×125×50
	9	Mast tilt range	F/R	deg	6\12	6\12	6\12	6\12
	10	Fork overhang(wheel center to fork face)		mm	476	476	481	486
	11	Rear overhang		mm	485	550	590	590
	12	Overall dimensions	Length to face of fork	mm	2610	2660	2762	2822
	13		Overall width	mm	1150	1150	1200	1200
	14		Mast lowered height	mm	2050	2050	2070	2070
	15		Mast extended height	mm	4200	4200	4210	4210
	16		Overhead guard height	mm	2130	2130	2180	2180
	17	Turning radius(outsude)		mm	2170	2230	2450	2510
	18	Min.right angle stacking aisle wiath (Add load length and clearance)		mm	2680	2740	2950	3010
Performance	19	Speed	Travel (No load)	Km/h	20	20	20	20
	20		Lifting (Full load)	mm/sec	450	450	400	400
	21		Lowering (Full load)	mm/sec	450	450	400	400
	22	Max.Drawbar Pull (Full load)		N	14300	14800	21000	21500
	23	Max.Gradeability (Full load)		%	20	20	20	20
Chassis	24	Tyres	Front	mm	7.00-12-12PR	7.00-12-12PR	28×9-15-12PR	28×9-15-12PR
	25		Rear	mm	6.00-9-10PR	6.00-9-10PR	6.50-10-10PR	6.50-10-10PR
	26	Tread	Font	mm	970	970	1010	1010
	27		Rear	mm	970	970	980	980
	28	Wheelbase		mm	1600	1600	1700	1760
	29	Ground clearance	Lowest		120	120	140	140
	30		Wheelbase center		145	145	175	175
Weight	31	Self weight		Kg	3580	3920	4450	4700
	32	Weight Distribution	Full load Front		4856	5588	6488	7134
	33		Full load Rear		724	832	962	1066
	34		No load Front		1428	1560	1810	1927
	35		No load Rear		2142	2360	2640	2773
Power & transmission	36	Battery	Voltage/Capacity(20HR)	V/AH	12/105			
	37	Engine	Modal		3E22YG51			
	38		Manufacture		XIN CHAI			
	39		Rated output/r.p.m	kw	44.8/2400			
	40		Rated torque/r.p.m	N.m	210/1600-1800			
	41		No.of cylinder		3			
	42		Bore×Stroke	mm	94X107			
	43		Displacement	cc	2226			
	44		Fuel tank capacity	L	60	60	70	75
	45	Transmissions	Manufacture		OEM	OEM	OEM	OEM
	46		Type		Powershift	Powershift	Powershift	Powershift
	47		Stage FWD/RVS		1/1	2/2	1/1	1/1
	48	Operating pressure	For attachments	Mpa	17.5	17.5	17.5	17.5

1.Special lifting height available (2-stage mast :2.5m,2.7m,3.0m,3.3m,3.5m,3.6m,3.7m,4m,4.3m,4.5m,5m. Full Free Duplex Mast 3.0m,3.3m,3.5m,3.6m. 3-stage mast : 4.3m,4.5m,4.8m,5m,5.5m,6m)
2.Attachment available. 3.The specification in the table are for standard models only,For further information please contact us. 4.Specification are subject to change without notice.

2.0~2.5t T8 series mast: (pneumatic)

Tpye	Model	Max.fork height	Overall height			Free lift		Front Overhang		Tilt range		Capacity			
			Lowered	Extended		Without backrest	With backrest			FWD	BWD	Load capacity at 500 mm			
				Without backrest	With backrest							Single tire		Double tire	
								2.0t	2.5t			2.0t	2.5t	2.0t	2.5t
		mm	mm	mm	mm	mm	mm	mm	mm	Deg	Deg	kg	kg	kg	kg
Wide view mast	2W200	2000	1550	2740	3420	120	120	476	476	6	10	2000	2500	2000	2500
	2W250	2500	1800	3040	3720	120	120	476	476	6	10	2000	2500	2000	2500
	2W270	2700	1900	3240	3920	120	120	476	476	6	10	2000	2500	2000	2500
	2W300	3000	2050	3540	4220	120	120	476	476	6	10	2000	2500	2000	2500
	2W330	3300	2200	3690	4370	120	120	476	476	6	10	2000	2500	2000	2500
	2W350	3500	2300	3890	4570	120	120	476	476	6	10	2000	2500	2000	2500
	2W360	3600	2350	3990	4670	120	120	476	476	6	10	2000	2500	2000	2500
	2W400	4000	2600	4040	4720	120	120	476	476	6	10	1900	2300	2000	2500
	2W430	4300	2750	4340	5020	120	120	476	476	6	6	1800	2100	1950	2450
	2W450	4500	2850	4290	4970	120	120	476	476	6	6	1700	2000	1900	2400
wide view full 2-stage mast	2F250	2500	1785	2090	2770	1210	560	476	476	6	10	2000	2500	2000	2500
	2F270	2700	1885	2290	2970	1310	660	476	476	6	10	2000	2500	2000	2500
	2F300	3000	2035	2590	3270	1460	810	476	476	6	10	2000	2500	2000	2500
	2F330	3300	2185	3840	4520	1610	960	476	476	6	10	2000	2500	2000	2500
	2F360	3600	2335	4140	4820	1760	1110	476	476	6	10	2000	2500	2000	2500
	2F400	4000	2585	4540	5220	2060	1410	476	476	6	10	1900	2300	2000	2500
wide view full 3-stage mast	3F430	4300	2035	4880	5560	1360	730	490	490	6	6	1700	2000	1900	2400
	3F450	4500	2115	5040	5720	1460	810	490	490	6	6	1600	1900	1800	2300
	3F480	4800	2220	5345	6020	1565	915	490	490	6	6	1500	1700	1700	2100
	3F500	5000	2305	5540	6220	1610	960	490	490	6	6	1400	1600	1600	2000
	3F550	5500	2555	6120	6800	1770	1120	490	490	3	6	1050	1200	1500	1800
	3F600	6000	2805	6540	7220	2020	1370	490	490	3	6	700	800	1400	1600

Note:1、With sideshifter minus 150Kg, with integral sideshifter minus 100Kg.

3.0-3.5t T8 series mast: (pneumatic)


Tpye	Model	Max.fork height	Overall height			Free lift		Front Overhang		Tilt range		Capacity			
			Lowered	Extended		Without backrest	With backrest			FWD	BWD	Load capacity at 500 mm			
				Without backrest	With backrest							Single tire	Double tire	Single tire	Double tire
								3.0t	3.5t			3.0t	3.0t	3.5t	3.5t
		mm	mm	mm	mm	mm	mm	mm	mm	Deg	Deg	kg	kg	kg	kg
Wide view mast	2W200	2000	1570	2570	3250	120	120	481	486	6	12	3000	3000	3500	3500
	2W250	2500	1820	3070	3750	120	120	481	486	6	12	3000	3000	3500	3500
	2W270	2700	1920	3270	3950	120	120	481	486	6	12	3000	3000	3500	3500
	2W300	3000	2070	3570	4250	120	120	481	486	6	12	3000	3000	3500	3500
	2W330	3300	2220	3690	4370	120	120	481	486	6	12	3000	3000	3500	3500
	2W350	3500	2320	3890	4570	120	120	481	486	6	12	3000	3000	3500	3500
	2W360	3600	2370	3990	4670	120	120	481	486	6	12	3000	3000	3500	3500
	2W400	4000	2620	4040	4720	120	120	481	486	6	12	2850	3000	3250	3500
	2W430	4300	2770	4340	5020	120	120	481	486	6	6	2700	2900	3000	3400
	2W450	4500	2870	4290	4970	120	120	481	486	6	6	2550	2850	2850	3350
wide view full 2-stage mast	2F250	2500	1830	2220	2900	1210	560	481	486	6	12	3000	3000	3500	3500
	2F270	2700	1930	2320	3000	1310	660	481	486	6	12	3000	3000	3500	3500
	2F300	3000	2080	2620	3300	1460	810	481	486	6	12	3000	3000	3500	3500
	2F330	3300	2230	3870	4550	1610	960	481	486	6	12	3000	3000	3500	3500
	2F360	3600	2380	4020	4700	1760	1110	481	486	6	12	3000	3000	3500	3500
	2F400	4000	2580	4420	5100	2060	1410	481	486	6	12	2850	3000	3250	3500
wide view full 3-stage mast	3F430	4300	2055	4910	5570	1360	730	495	500	6	6	2550	2850	2850	3350
	3F450	4500	2135	5070	5750	1460	810	495	500	6	6	2400	2700	2700	3200
	3F480	4800	2240	5375	6050	1565	915	495	500	6	6	2250	2550	2450	2950
	3F500	5000	2325	5570	6250	1610	960	495	500	6	6	1650	2250	2300	2800
	3F550	5500	2575	6150	6830	1770	1120	495	500	3	6	1800	2250	1800	2550
	3F600	6000	2825	6570	7250	2020	1370	495	500	3	6	1200	2100	1300	2300

Note:1、With sideshifter minus 200Kg, with integral sideshifter minus 150Kg.

RATED CAPACITIES AND LOAD CENTERES GRAPH

CPCD20T8


SUBTRACT 150kg WITH SIDESHIFTER

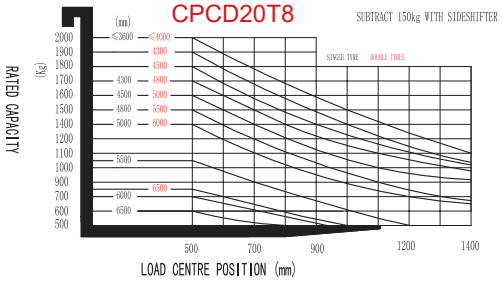

RATED CAPACITIES AND LOAD CENTERES GRAPH

CPCD25T8


SUBTRACT 150kg WITH SIDESHIFTER

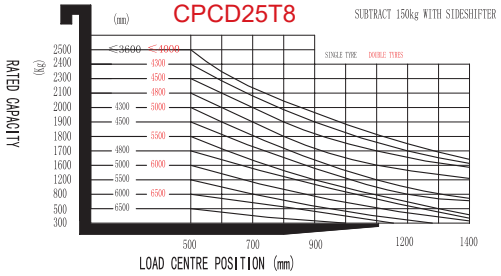

RATED CAPACITIES AND LOAD CENTERES GRAPH

CPC(Q)D30T8


SUBTRACT 200kg WITH SIDESHIFTER

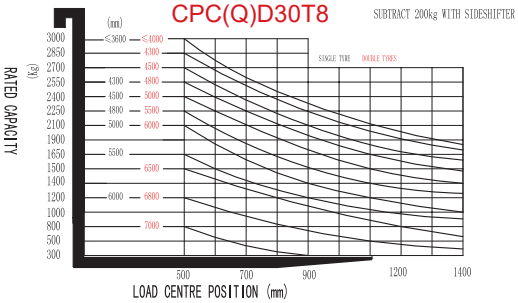



RATED CAPACITIES AND LOAD CENTERES GRAPH

CPC(Q)D35T8

SUBTRACT 200kg WITH SIDESHIFTER

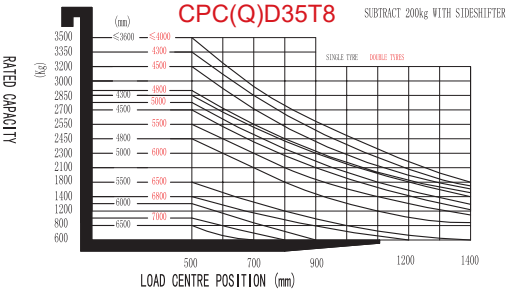

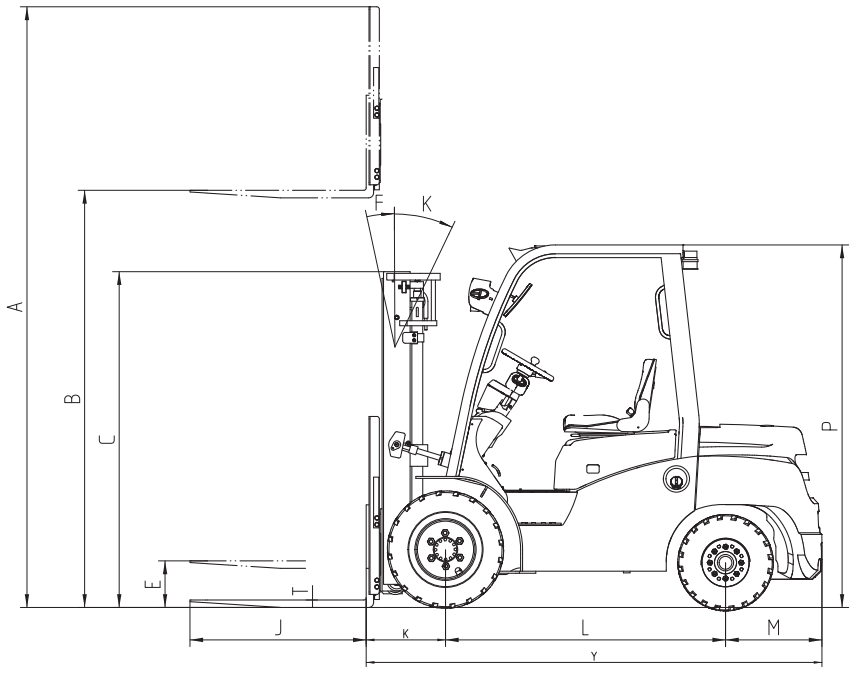

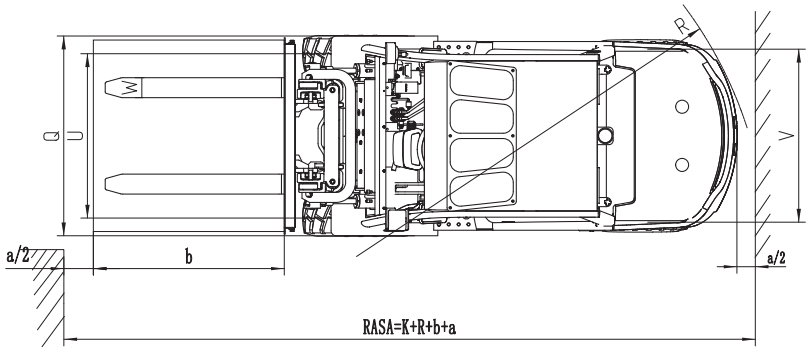

Option

	Options	20/25T8	30T8	35T8
1	Fork length	○	○	○
2	Fork extension	○	○	○
3	Folded fork	○	○	○
4	Imported diesel engine	○	○	○
5	Import Gasoline Engine	○	○	○
6	LPG system	○	○	○
7	High exhaust	○	○	○
8	Dual air clearners or special air cleaner	○	○	○
9	Solid rubber tire	○	○	○
10	No marking solid tire	○	○	○
11	Overhead guard	●	●	●
12	Mast options	○	○	○
13	Attachments	○	○	○
14	Integrated side shift	○	○	○
15	Cockpit	●	●	●
16	heater	○	○	○
17	Front windshield with wiper	○	○	○
18	Rear windshield with wiper	○	○	○
19	Fan	○	○	○
20	Full steel cabin room	○	○	○
21	LED front light	●	●	●
22	Rear working LED light	○	○	○
23	Fire extinguisher	○	○	○
24	Suspension seat	○	○	○
25	Seat switch	●	●	●
26	Warning light	●	●	●
27	Insulation mat	○	○	○
28	Double front tyre	○	○	○
29	OPS system	○	○	○

Note: ● standard ○ option — NA